


Bolide Track Lights

ITEM SKU#: 662187490021

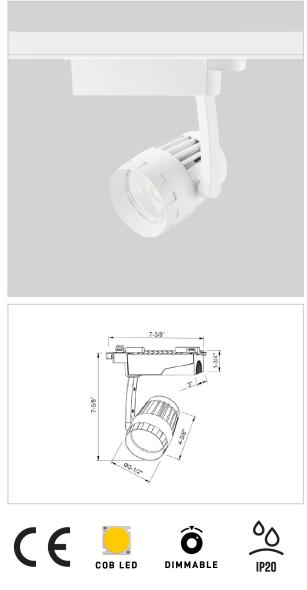

Voltage 100 - 277 V AC, 50-60 Hz Lumen Output 2579.8lm 30W Power 140lm/w Efficacy 2700K CCT CRI >90 15° Beam Angle Light Distribution Spot COB LED Type LED Light Source Osram SOLERIQ S 19 Start Time Instant Driver Stand Alone (included) **Operating Position** Swiveling Type Dimming Triac Dimming Construction Track Track Light Structure Mounting Type Heads Single Head White Finish 4-5/8" Length Height 7-5/8" Diameter 3-1/2" Cut Out 7-3/8" Width (W) 7-3/8" Application Area Indoor Applications

Product Code : IK-RBOLIDETL-30W-27K-WH-90C-15D

Spot 15° Medium

Beam Spread (Options)

| Spot 15° | | Mediom 25° | | Fluuu 36° | | Wide Flood 60° | |
|----------|------|------------|------|--------------------|-------|----------------|--------------------|
| ft | Ø | ft | Ø | ft | Ø | ft | Ø |
| 3.0 | 0.72 | 3.0 | 1.41 | 3.0 | 2.03 | 3.0 | 3.15 |
| 9.0 | 2.15 | 9.0 | 4.22 | 9.0 | 6.09 | 9.0 | <mark>9.4</mark> 5 |
| 15.0 | 3.58 | 15.0 | 7.04 | 15. <mark>0</mark> | 10.15 | 15.0 | 15.75 |

Bolide is a technologically advanced LED track light with incorporated electronic gear and chip on board. It also has a high-quality reflector with three different beam spreads. Moreover, the lamp housing of die-cast aluminum for optimal cooling allows the fixture to last longer than its traditional counterparts.

Technical Data

IES File Link 🕹

Installation Instructions Link 🕹



retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.