


# Ocul Down Lights

ITEM SKU#: 662187497228

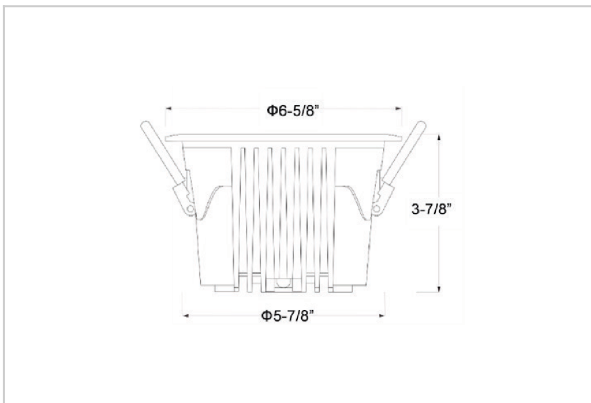

## Product Code : IK-ROCULDL-30W-40K-WH-90C-15D

|                    |                                             |
|--------------------|---------------------------------------------|
| Voltage            | 100 - 277 V AC, 50-60 Hz                    |
| Lumen Output       | 4200lm                                      |
| Power              | 30W                                         |
| Efficacy           | 140lm/w                                     |
| CCT                | 4000K                                       |
| CRI                | >90                                         |
| Beam Angle         | 15°                                         |
| Light Distribution | Spot                                        |
| LED Type           | COB                                         |
| LED Light Source   | Osram SOLERIQ S 19                          |
| Start Time         | Instant                                     |
| Driver             | Stand Alone (included)                      |
| Operating Position | Non - Swiveling Type                        |
| Dimming            | On-Off / Triac / 0-10 V                     |
| Construction       | Round                                       |
| Mounting Type      | Recessed                                    |
| Heads              | Single Head                                 |
| Body Material      | Aluminium Die cast                          |
| Finish             | White                                       |
| Height             | 3-7/8"                                      |
| Diameter           | 6-5/8"                                      |
| Cut Out            | 5-7/8"                                      |
| Optics             | Darklight Technology Black, Silver          |
| Application Area   | Classroom, Meeting Room, Office, Club, Home |



### Beam Spread (Options)

| Spot 15° |      | Medium 24° |      | Flood 36° |       | Wide Flood 60° |       |
|----------|------|------------|------|-----------|-------|----------------|-------|
| ft       | Ø    | ft         | Ø    | ft        | Ø     | ft             | Ø     |
| 3.0      | 0.72 | 3.0        | 1.41 | 3.0       | 2.03  | 3.0            | 3.15  |
| 9.0      | 2.15 | 9.0        | 4.22 | 9.0       | 6.09  | 9.0            | 9.45  |
| 15.0     | 3.58 | 15.0       | 7.04 | 15.0      | 10.15 | 15.0           | 15.75 |

Ocul, a round shaped LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.